


# Relief Valves



## Balanced Piston Type Relief & Sequence Valves


CG-10-\*\*\*-30

Model	■ Cover	Body	Spring	■ Spring	Pressure Range PSI	■ Included in Cover S/A
CG-10-B-30	581700	581703	291822	2280	125-1000	941286
CG-10-BV-30			291821			-
CG-10-BVY-30	590299	591450	291822	583937	500-2000	941287
CG-10-BY-30			291821			-
CG-10-C-30	581700	581703	291822	2281	1500-3000	941288
CG-10-CV-30			291821			-
CG-10-CVY-30	590299	591450	291822	291821	291822	-
CG-10-CY-30			291821			-
CG-10-F-30	581700	581703	291822	2281	1500-3000	941288
CG-10-FV-30			291821			-
CG-10-FVY-30	590299	591450	291822	291821	291822	-
CG-10-FY-30			291821			-

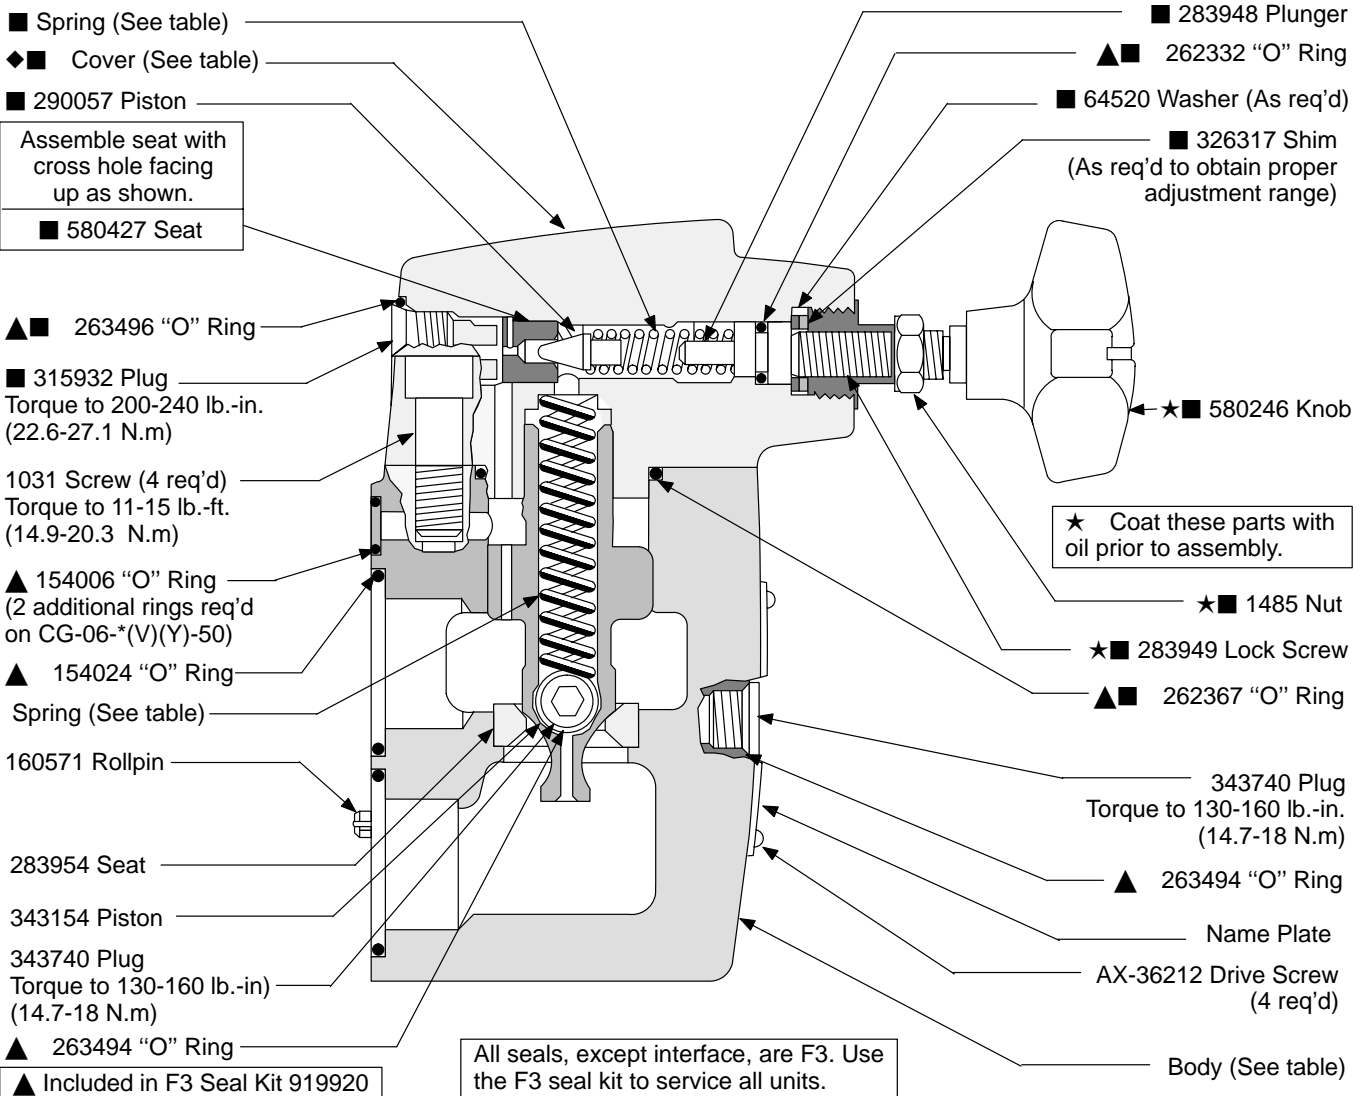

# Model Code Breakdown

---

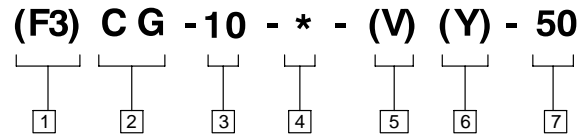

**1 Seals**

**F3** - Multi-fluid capability (Viton® seals)

*Viton is a registered trademark of E.I. DuPont*

**2 Model Series**

**CG** - Relief valve, manifold or subplate mounted

**3 Size**

**10** - 1-1/4 inch

**4 Pressure Range**

**B** - 125-1000

**C** - 500-2000

**F** - 1500-3000

**5 Vent Pressure**

**V** - High vent pressure  
(Omit for standard vent pressure.)

**6 External Drain Feature**

**Y** - Sequence valve  
(Omit for standard relief.)

**7 Design**

---

For satisfactory service life of these components, use full flow filtration to provide fluid which meets ISO cleanliness code 18/15 or cleaner. Selections from Eaton OFF, OFR and OFRS filter series are recommended.

Printed in U.S.A.